




8 7 6 5 4 3 2 1


F  
E  
D  
C  
B  
A

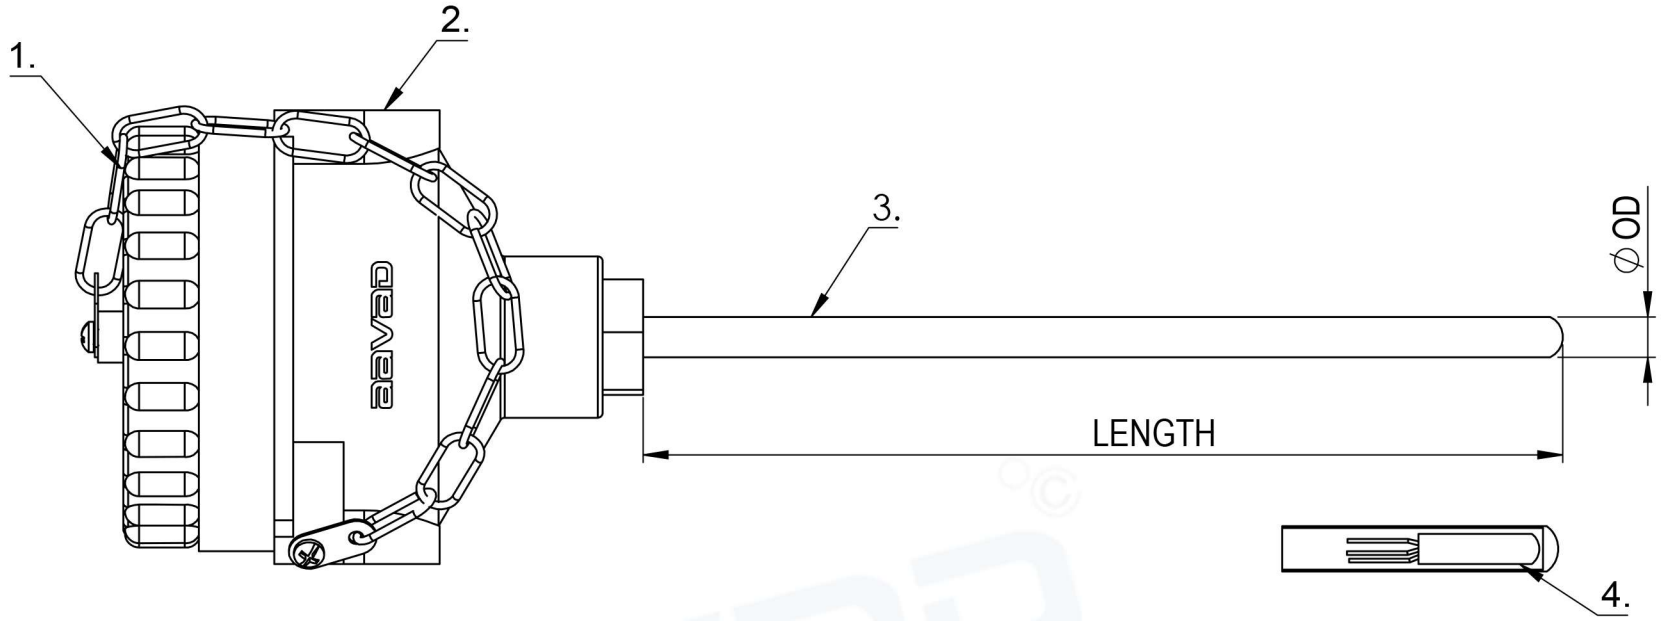

CABLE ENTRY VIEW



CERAMIC TERMINAL BLOCK



CONNECTION DIAGRAM

SR.NO.	DESCRIPTION	
1	PROTECTION HEAD	DIE-CAST ALUMINUM HEAD WITH THREADED CAP & CHAIN
2	NO. OF CABLE ENTRY	SINGLE
3	SHEATH MATERIAL	SS 316 WITH TEFLON COATING
4	ELEMENT	CLASS-A
5	CONFIGURATION	SIMPLEX, 3 WIRE
6	CERAMIC TERMINAL BLOCK	NICKEL-PLATED CERAMIC
7	INSULATION	COMPACTED MGO INSULATION
8	TEMPERATURE RANGE	-50 To 250 DEGREE CELSIUS
9	OD	6 MM
10	LENGTH	400 MM

NOTE: ALL DIMENSIONS ARE IN MM  
 TOLERANCE- 0.2 MM UPTO 10 MM  
 TOLERANCE- 1MM UPOT 100MM  
 TOLERANCE- 5MM UPOT 100 MM ABOUT



REMARKS	DRN.BY: MITESH	PO.NO:	PROJECTION
	CHD.BY: RAJAT	PROJ.NO:	
	APP.BY: RAJANIKANT	DEPT:DESIGN	
	DATE: 31.07.2024	SCALE:NTS	

AAVAD INSTRUMENT PVT.LTD		DRG.NO. MG002-A	0
TITLE: ACID AND ALKALI RTD - WITH TEFLON COATING			
CUSTOMER:- AAVAD INSTRUMENT PVT.LTD		SHEET 1 OF 1	REV.

8 7 6 5 4 3 2 1

F  
E  
D  
C  
B  
A